


AMERICAN AVK RESILIENT SEATED GATE VALVE
250 PSI, Tested to AWWA C509 (NRS) for Indicator Post
Push-On Joint (TYTON) - Valve sizes 4" - 12"

25/50X
POxPO PIV

Component List:

- | | | |
|---------------------------|------------------------------|-----------------------------|
| 217. Bonnet | 226. Wiper Ring | 232. Lower Stem Seal O-Ring |
| 218. Bonnet Gasket | 227. Gland Flange Bolt | 235. Anti-Friction Washer |
| 219. Body | 229. Gland O-Ring | 236. Low Zinc NRS STem |
| 224. Post Indicator Plate | 230. Upper Stem Seal O-Rings | 237. Wedge |
| 225. Wrench Nut | 231. Stem Seal Bushing | |

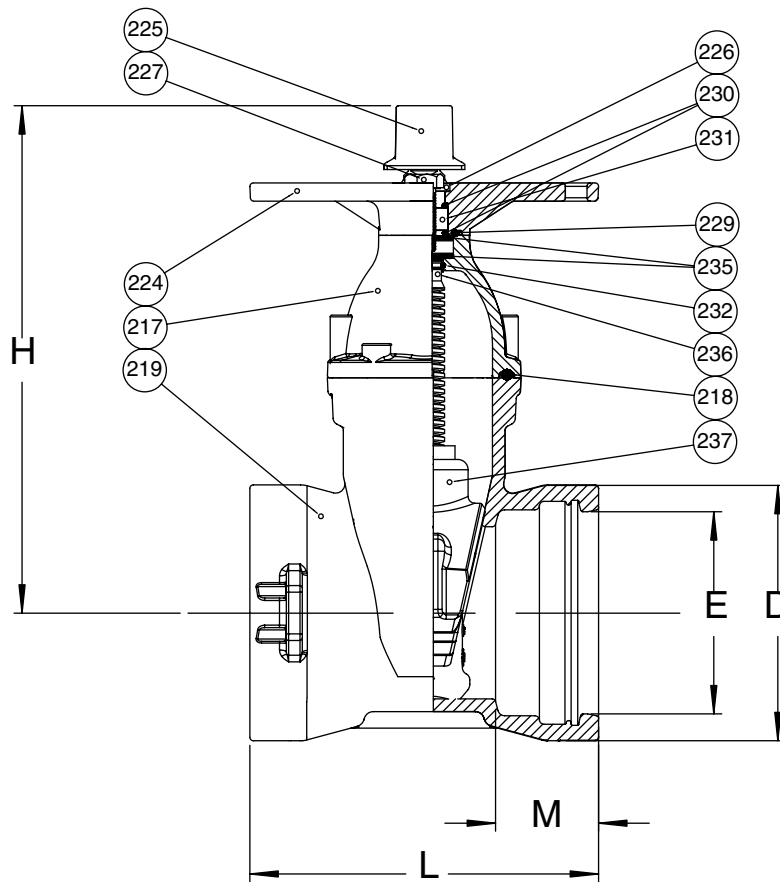

Ref No.	Size	D	E	H	L	M	Turns to Open	Wt. Lbs.
25-100-50X	4"	6.85"	4.93"	13.58"	10.12"	3.09"	14	88
25-150-50X	6"	9.12"	7.03"	17.50"	12.05"	3.58"	21	138
25-200-50X	8"	11.46"	9.18"	21.50"	12.99"	3.89"	26	205
25-250-50X	10"	13.81"	11.22"	24.75"	13.85"	3.76"	32	356
25-300-50X	12"	16.14"	13.32"	27.75"	15.59"	4.33"	38	412

