

AMERICAN AVK RESILIENT SEATED DUCTILE IRON GATE VALVE
250 PSI, Tested to AWWA C509 (NRS)
DI Grooved End according to AWWA C606 - Valve Sizes 3" - 8"

45/7X
DI GRxGR

Use:

For water and neutral liquids to maximum 160°F.

Tests:

Hydraulic test to AWWA C509:

Shell Test: 500 PSI

Seat Test: 250 PSI

Operating Torque Test

Optional Materials:

Stem	Option a):	Stainless steel ASTM A582
Bonnet Bolts	Option a):	Stainless Steel - 304 sealed with hot melt
	Option b):	Stainless Steel - 316 sealed with hot melt
Gland Bolts	Option a):	Stainless Steel - 304 Hexagon bolt
	Option b):	Stainless Steel - 316 Hexagon bolt

Approvals:



*UL/ULC Listed,

*FM Approved


NSF-61 (audited by UL)

* Approved at 250 PSI working pressure

Standard Materials:

For UL, FM, ULC listings

Body, Gland Flange Wrench Nut	Ductile iron ASTM A536 (Wrench Nut)- painted black for open left, red for open right.
Bonnet, Handwheel	Cast iron ASTM A126 class B
Coating	Electrostatically applied fusion- bonded epoxy-resin . Meets or exceeds AWWA C550.
Stem	Standard: Low zinc bronze ASTM B763
Wedge	Ductile iron ASTM A536 encapsulated with EPDM-rubber compound
Thrust Collar, Wedge Nut	Bronze
Anti-Friction Washers	Polyamide
Bonnet Bolts	ASTM A164 zinc coated steel sealed with hot melt
Gland Bolts	ASTM A164 zinc coated steel
Bonnet Gasket, Wiper Ring, O-Ring Stem Seals	ASTM D2000 Buna "N" nitrile rubber

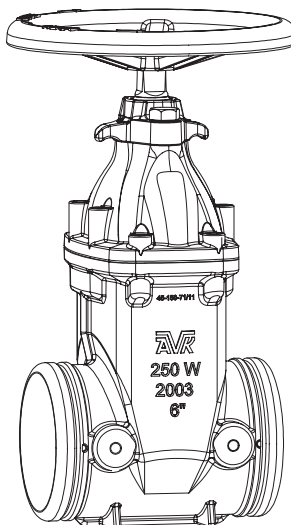

American AVK Company
an ISO 9001-2000 registered company


DS S457X DI GRGR
Subject to change without notice. (rev. 02/06)

**AMERICAN AVK RESILIENT SEATED, DUCTILE IRON, 250 PSI,
GATE VALVE - Tested to AWWA C509 (NRS)
- DI Grooved End according to AWWA C606 - Valve Sizes 3" - 8"**

**45/7X
DI GRxGR**

Component List:

217. Bonnet	227. Gland Flange Bolt	232. Lower Stem Seal O-Ring
218. Bonnet Gasket	228. Gland Flange	233. NRS Stem
219. Body	229. Gland O-Ring	234. Thrust Collar
222. NRS Handwhhel	230. Upper Stem Seal O-Rings	237. Wedge
226. Wiper Ring	231. Stem Seal Bushing	

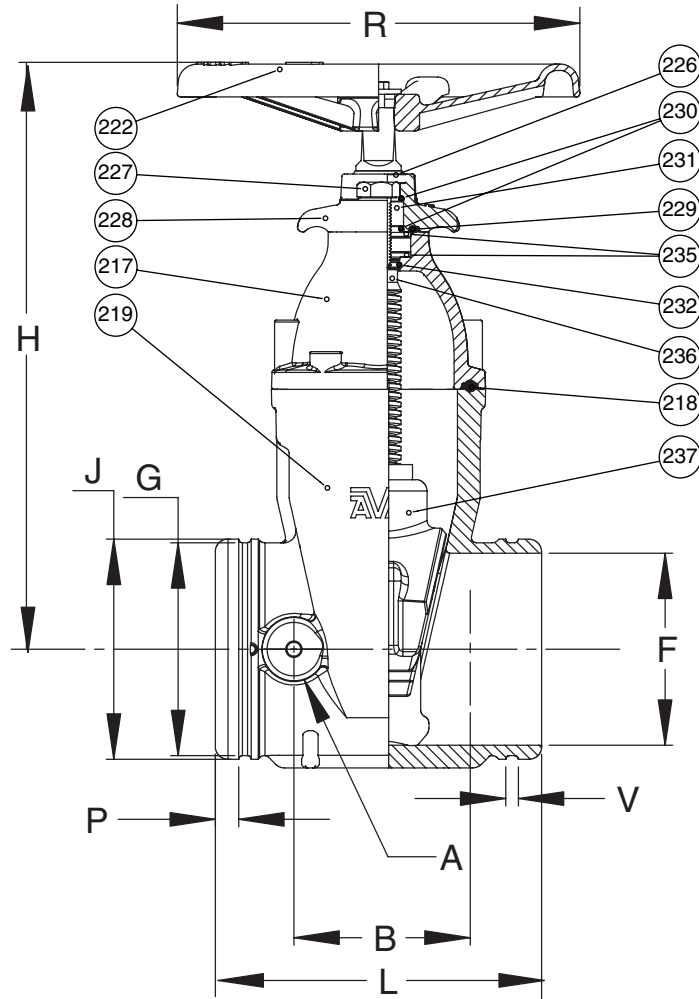

Ref No.	Size	A	B	F	G	H	J	L	P	R	V	Turns to Open	Weight Lbs.
45-080-7X	3"	1.57"	3.74"	3.00"	3.71"	12.50"	3.93"	8.00"	0.75"	8.86"	0.38"	13	35
45-100-7X	4"	1.65"	4.12"	4.00"	4.56"	13.50"	4.80"	9.00"	0.75"	11.02"	0.38"	14	46
45-150-7X	6"	1.97"	5.29"	6.00"	6.65"	17.50"	6.90"	10.50"	0.75"	12.60"	0.38"	21	87
45-200-7X	8"	1.97"	8.00"	8.00"	8.78"	21.50"	9.05"	11.50"	0.87"	14.17"	0.50"	26	133

