


AMERICAN AVK RESILIENT SEATED DUCTILE IRON GATE VALVE
250 PSI, Tested to AWWA C509 / C515 (NRS)
Push-on Joint End x Push-on Joint End (TYTON) - Valve sizes 4" - 12" and 16"

45/CX
POxPO

Component List:

- | | | |
|--------------------|------------------------------|-----------------------------|
| 217. Bonnet | 227. Gland Flange Bolt | 232. Lower Stem Seal O-Ring |
| 218. Bonnet Gasket | 228. Gland Flange | 233. NRS Stem |
| 219. Body | 229. Gland O-Ring | 234. Thrust Collar |
| 225. Wrench Nut | 230. Upper Stem Seal O-Rings | 237. Wedge |
| 226. Wiper Ring | 231. Stem Seal Bushing | |

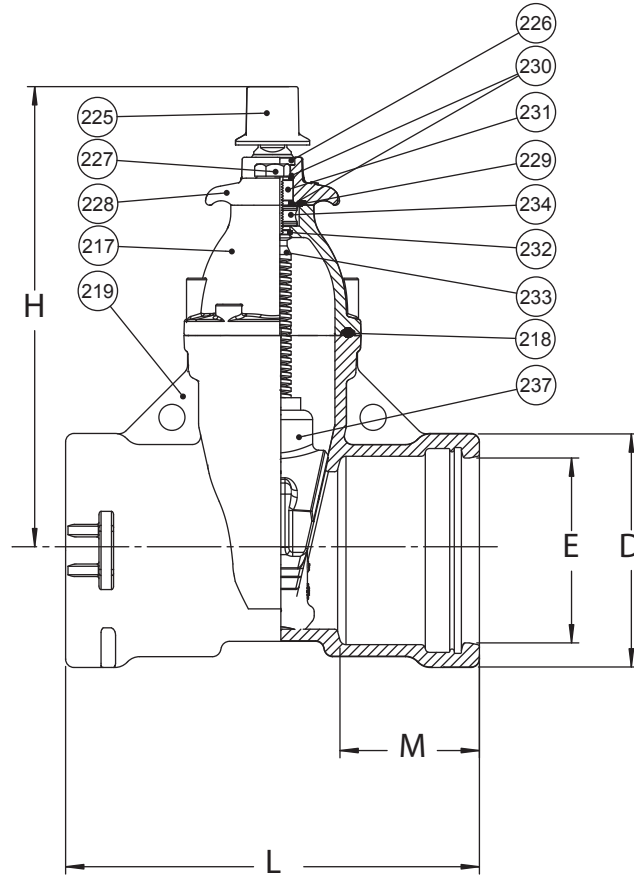

Ref No.	Size	D	E	H	L	M	Turns to Open	Weight (lbs.)
45-100-CX	4"	6.66"	4.93"	13.50"	11.99"	4.12"	14	57
45-150-CX	6"	8.84"	7.03"	17.50"	15.63"	5.22"	21	97
45-200-CX	8"	11.23"	9.18"	21.50"	17.17"	5.63"	26	157
45-250-CX	10"	13.50"	11.22"	24.75"	17.64"	5.63"	32	227
45-300-CX	12"	15.74"	13.32"	27.75"	19.21"	5.63"	38	33
45-400-CX	16"	20.62"	17.50"	34.75"	22.72"	6.00"	51	982

