


**AVK** SERIES 67 POST / FLUSHING DRY BARREL HYDRANT



**EXPECT SOLUTIONS, NOT JUST PRODUCTS**

Expect... **AVK**

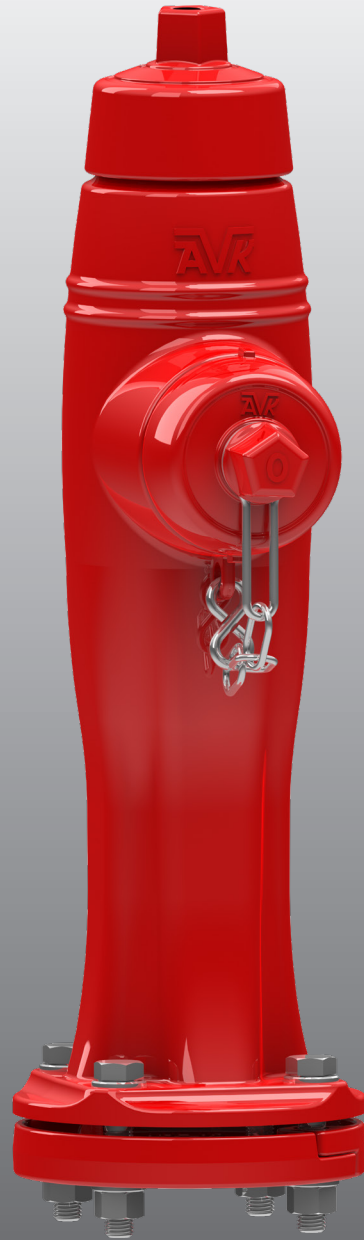

# AVK DRY BARREL POST/FLUSHING HYDRANT

The AVK Series 67 Post Hydrant is designed and built to the same strict attention to detail and quality as the full size AVK hydrants.

- Tested to AWWA C502
- Self draining dry barrel hydrant to prevent freezing.
- Available in any depth of bury ( 6 inch increments ).
- 2 ¼" main valve opening.
- Low head loss design.
- Rated to 250 PSI working pressure.
- All internal parts are removable from the top for easy maintenance.
- Can be open left or open right .
- Optional hand wheel available.
- Optional stainless steel lower stem.
- Certified to: ANSI/NSF 61, ANSI/NSF 372
- 1 year warranty

Operating nut available in a wide variety of shapes and sizes

Two lower and one upper o-ring.

2.5" NST hose outlet standard; optional threads upon request. Easily replaced in the field.

Optional 2.5" Storz nozzle.

Breakable traffic flange and stainless steel breakable coupling.

Cast ductile iron barrels: 1/2 ft. through 4 1/2 ft. Can be bolted together for any bury depth.

Bronze drain ring and main valve seat.

Fusion bonded epoxy coated shoe with foot for easy installation.



Weathershield  
Optional Handwheel

Grease filled operating assembly.

Stainless steel upper stem

Ductile iron nozzle section



EPDM encapsulated ductile iron one piece main valve. Easy to replace.

Optional inlets:

- Flanged 2 ½", 3"
- MJ 2", 3", 4"
- NPT 2", 2 ½", 3"
- Hymax Grip® 2"

## American AVK Company

2155 Meridian Blvd.  
Minden, NV  
89423  
USA

Tel.: 775-552-1400  
Fax.: 775-552-1031  
sales@avkus.com  
www.americanavk.com